
BSBP Belspray

motorised pump unit sprayer for cold bitumen emulsion

Contact: Sales at BX Plant on +44 (0) 1243 781970 or email: <u>rhodge@bxplant.com</u> 9 Little London, Chichester, West Sussex PO19 1PH, UK

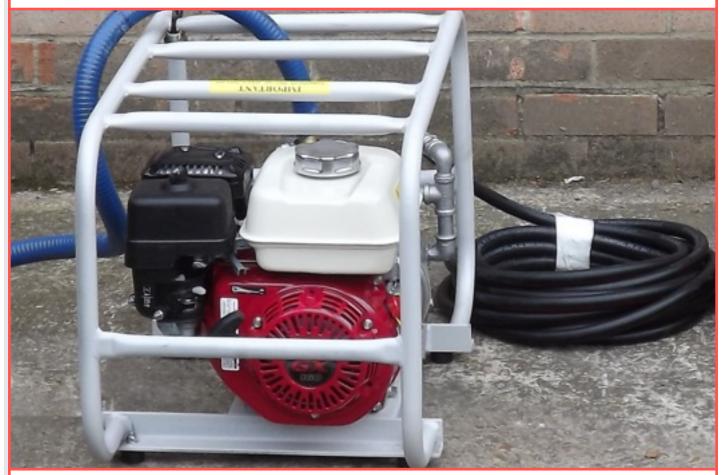

Specification of BSBP Belspray

direct-from-drum motorised sprayer for cold bitumen emulsion

Chassis:	Tubular frame with 4 No. ant-virbration mount feet.
Pump:	Albany gear-type pump with relief valve set at 65psi. Filter fitted on inlet.
Engine:	Briggs & Stratton Intek or Honda GX120/160 petrol engine with 6:1 reduction box direct coupled to pump. Yanmar diesel with electric start also available.
Suction:	Suction pipe with strainer - 1.2m long; 25mm flexible suction hose -1.8m long
Hose:	13mm dia bore oil delivery hose, 30m long with hose fittings. Supplied in 3 x 10m lengths.
Lance:	13mm dia bore galvanised steel spray lance 2m long with handle, control valve and brass spray jet.
Spray rate:	20 to 25 litres per minute depending on the grade of bitumen used and the speed of the operator.
Emulsion:	Suitable for cold bitumen emulsion - Grade K1-40 & K1-60
Shipping:	Dimensions 750 x 480 x 520mm
Net weight:	Packed weight in cardboard box: 63kgs
Tariff No:	8424 20000

Tariff No: 8424.20000